

'16
NOVEDAD
NEW

CARACTERÍSTICAS TÉCNICAS TECHNICAL CHARACTERISTICS



El cuerpo de la bomba está construido con termoplásticos de última generación. Las bombas son autoaspirantes de 1/2 Cv hasta 3 Cv, y se proporcionan con motores monofásicos y trifásicos. En el cuerpo de la bomba se ha integrado un prefiltro para evitar la entrada de objetos extraños que pudieran dañar las partes hidráulicas de la bomba. Los motores que se suministran con el conjunto motor bomba han sido protegidos con IP-55 y acondicionados para soportar ambientes calurosos y niveles de humedad elevados. Rodamiento delantero de tamaño superior para mejorar esfuerzos axiales

The body of the pump is made of the latest generation thermoplastics. The pumps are Selfpriming and range from 1/2 Hp up to 3 Hp, and are provided with both single-phase motors and three-phase motors. A pre-filter has been integrated into the body of the pump to prevent the entry of any foreign bodies which could cause damage to the hydraulic parts of the pump. The motors supplied with the motor pump unit have been protected with IP-55 protection and are adapted to withstand hot atmospheres and high humidity levels. Oversized front bearing to improve axial forces


BOMBA VICTORIA PLUS SILENT VICTORIA PLUS SILENT PUMP

BOX										
CODIGO CODE	POTENCIA POWER	TENSION VOLTAGE	H MAX	RPM	Q NOM	H NOM	Conjunto accesorios PVC (no incluidos) Set fittings PVC (not included).	PESO WEIGHT	VOLUMEN VOLUME	
	CV/HP	V	m		m3/h	m		Kg	m3	
65557	1/2 CV II	230V	13	2810	10	8	68188	12	0,07	
65558	1/2 CV III	230/400V	13	2825	10	8		12		
65560	3/4 CV II	230V	14	2802	11	10		13		
65561	3/4 CV III	230/400V	14	2810	11	10				
65562	1 CV II	230V	17	2810	16	10		14		
65563	1 CV III	230/400V	17	2810	16	10				
65564	1,5 CV II	230V	18	2800	21,5	10	67655			
65565	1,5 CV III	230/400V	18	2810	21,5	10				
65566	2 CV II	230V	18	2860	26	10		17		
65567	2 CV III	230/400V	18	2800	26	10				
65569	3 CV II	230V	22,5	2827	34	10	67655+68189	18		
65570	3 CV III	230/400V	22,5	2780	34	10				



DIMENSIONES/ CURVAS DE RENDIMIENTO

DIMENSIONS / PERFORMANCE CURVES

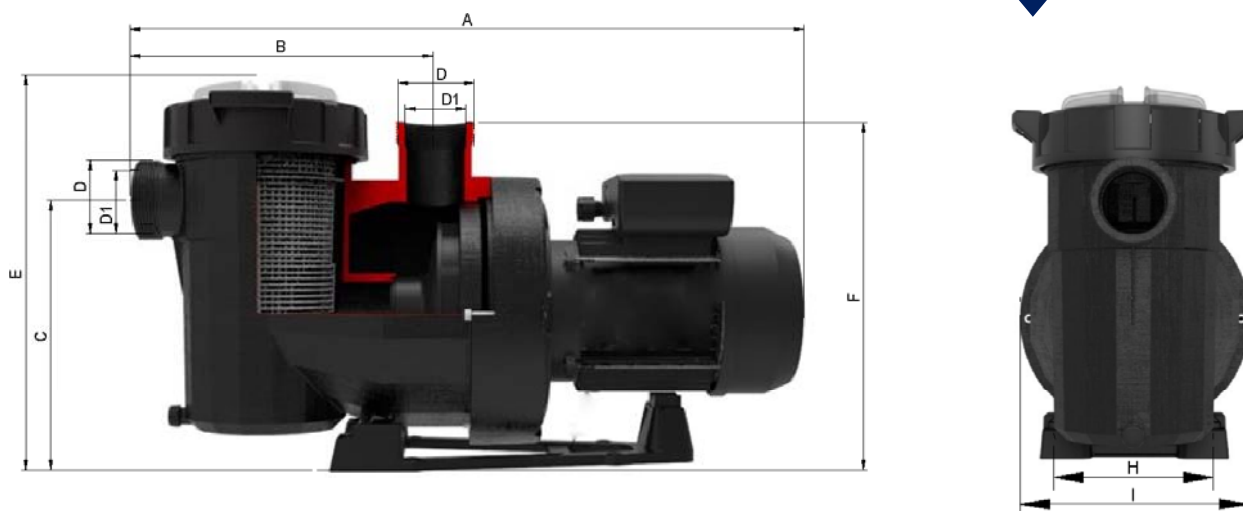

CODE / CODIGO	MOTOR				DIMENSIONS / DIMENSIONES									
	HP / Cv	VOLTAGE		H max.	A	B	C	D	D1	E	F	G	H	I
		V		m	(mm)									
65557	½	230	C.71	13	581	281	246	ACME D.75	2" GAS	359	322	321	164	254
65558		230 - 400			581	281	246	ACME D.75	2" GAS	359	322	321	164	254
65560	¾	230		14	581	281	246	ACME D.75	2" GAS	359	322	321	164	254
65561		230 - 400			581	281	246	ACME D.75	2" GAS	359	322	321	164	254
65562	1	230	C.71	17	581	281	246	ACME D.75	2" GAS	359	322	321	164	254
65563		230 - 400			581	281	246	ACME D.75	2" GAS	359	322	321	164	254
65564	1 ½	230	C.80	18	615	281	246	ACME D.75	2" GAS	359	356	321	164	254
65565		230 - 400			615	281	246	ACME D.75	2" GAS	359	356	321	164	254
65566	2	230		18	615	281	246	ACME D.75	2" GAS	359	356	321	164	254
65567		230 - 400			615	281	246	ACME D.75	2" GAS	359	356	321	164	254
65569	3	230	C.90	22,5	646	281	246	ACME D.75	2" GAS	359	387	321	164	254
65570		230 - 400	C.80		615	281	246	ACME D.75	2" GAS	359	356	321	164	254

CURVAS DE RENDIMIENTO AH-Q

PERFORMANCE OF PUMPS AH-Q

