
Description: MULTIPORT VALVE
Multiport valve, usually used in a swimming pool to choose different functions of the filtration system: filtration, emptying, closing, backwashing, recirculation and rinsing.
Maximum working pressure: 3,5 bar
Material: ABS - **Distributor:** PPO - **Gaskets:** EPDM



MODEL	Classic - Cover closed by screws
ASSEMBLY	Side mount / Installation couplings included, but not assembled (o-rings for connection to filter included)
POSITION	P3
STANDARD	BSP threads
SPECIAL	


POSITION 3

TOP 1





The arrows indicate the sense of flow in Filtration position

BOTTOM 2

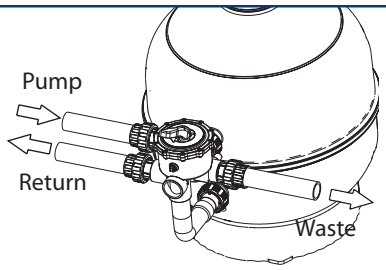

DIMENSIONS

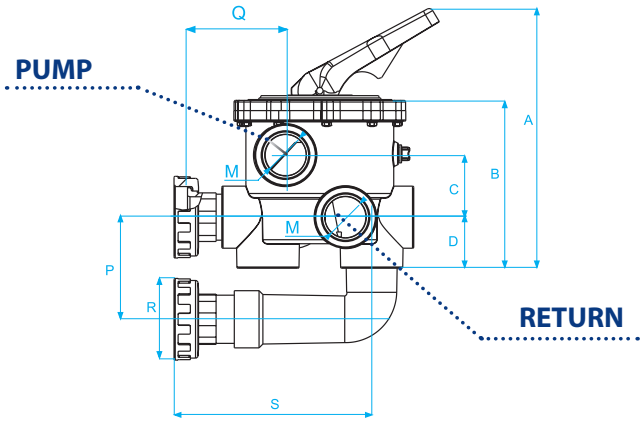


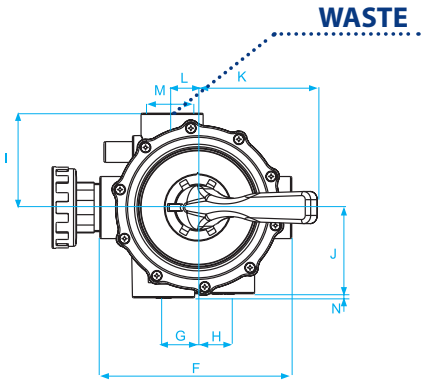


	PUMP	RETURN	WASTE	TOP 1	BOTTOM 2
1½"	1½" BSP	1½" BSP	1½" BSP	1½" BSP	Ø50 mm
2"	2" BSP	2" BSP	2" BSP	2" BSP	Ø63 mm


PRESSURE LOSS


Valve 1½" / Válvula 1½"

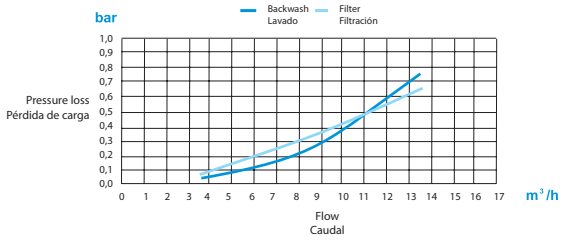

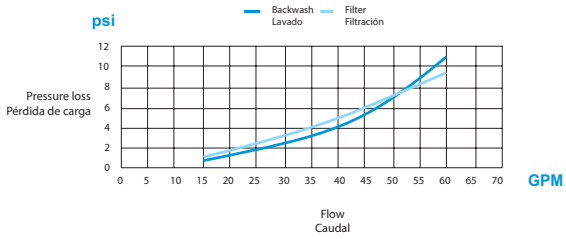

Valve 2" / Válvula 2"

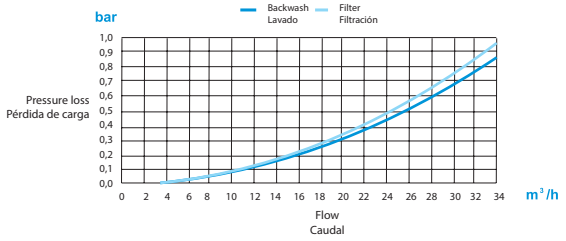

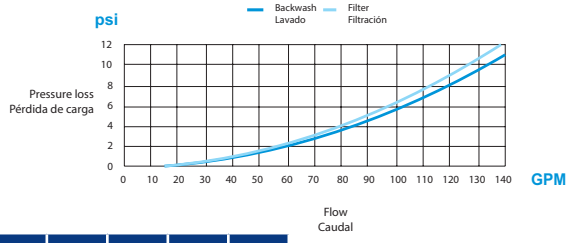

CODE	SIZE	A	B	C	D	F	G	H	I	J	K	L	M	N	P	Q	R	S
09758	**1½"**	271	180	64	61	172	43	30	95	90	121	31	50	6	125	97,5	96	211
14904	**2"**	317	211	76	62,5	237	42	31,5	115,5	105,5	145	31,5	63	5	230	120	96	247